

**Technical Data****GH1-T174FC****Nominal Input**

Phase:	1ph + neutral + PE
Voltage:	230 VAC +/- 10%
Frequency:	50Hz
Input Current:	32A
Input Power:	7.4kVA

**Nominal Output**

Voltage:	230 VAC +/- 10%
Current:	32A
Nominal Power:	7.4kVA
Over Current:	32A
RCD:	30mA (Type A)

**General Specifications**

Standards:	IEC61851-1, IEC61851-22, IEC TS 61439-7
Charging:	Mode 3
Plug:	J1772 (Type 1) plug + 5m cable

**Weight**

With Socket:	3 kg
With Cable & Connectors:	3.8 kg - 4.1 kg

**Mounting****Wall mount**


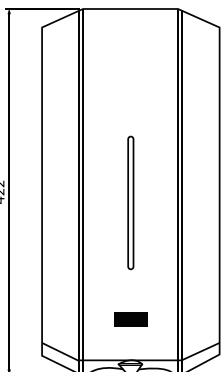

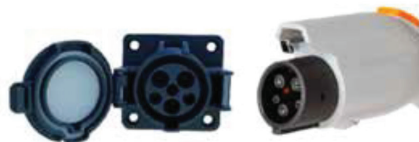
Height:	422 mm
Width:	205 mm
Diameter:	124 mm

**Protection****IP44**

Operating Temp	-25C -+ 40C
Options	MID Meter

**Accessories**

GLK1 T23A 230V	EV Cable Type 2 32A / 230V
----------------	----------------------------

**Dimensions**Type 1 (J1772) Fixed Connector  
(max 230V / 32A / 7.4 kW)EU standard Type 2 (IEC 62196) Socket Outlet  
OR Fixed Connector (max 400V / 63A / 43kW)