



Technical Data		GH1-T174FC
Nominal Input		
Phase:	1ph + neutral + PE	
Voltage:	230 VAC +/- 10%	
Frequency:	50Hz	
Input Current:	32A	
Input Power:	7.4kVA	
Nominal Output		
Voltage:	230 VAC +/- 10%	
Current:	32A	
Nominal Power:	7.4kVA	
Over Current:	32A	
RCD:	30mA (Type A)	
General Specifications		
Standards:	IEC61851-1, IEC61851-22, IEC TS 61439-7	
Charging:	Mode 3	
Plug:	J1772 (Type 1) plug + 5m cable	
Weight		
With Socket:	3 kg	
With Cable & Connectors:	3.8 kg - 4.1 kg	
Mounting		Wall mount
Height:	422 mm	
Width:	205 mm	
Diameter:	124 mm	
Protection		IP44
Operating Temp	-25C -+ 40C	
Options	MID Meter	
Accessories		
GLK1 T23A 230V	EV Cable Type 2 32A / 230V	

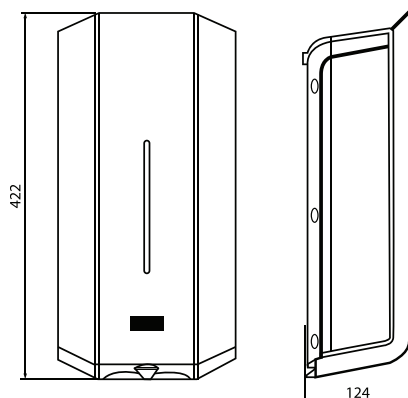

Dimensions



Type 1 (J1772) Fixed Connector
(max 230V / 32A / 7.4 kW)



EU standard Type 2 (IEC 62196) Socket Outlet
OR Fixed Connector (max 400V / 63A / 43kW)