

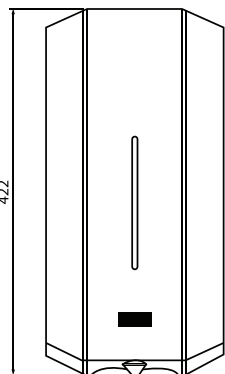


Technical Data	GHL-T274FC
Nominal Input	
Phase:	1ph + neutral + PE
Voltage:	230 VAC +/- 10%
Frequency:	50Hz
Input Current:	32A
Input Power:	7.4kVA
Nominal Output	
Voltage:	230 VAC +/- 10%
Current:	32A
Nominal Power:	7.4kVA
Over Current:	32A
RCD:	30mA (Type A)
General Specifications	
Standards:	IEC61851-1, IEC61851-22, IEC TS 61439-7
Charging:	Mode 3
Plug:	IEC 62196 (Type 2) plug + 5m cable
Weight	
With Socket:	3 kg
With Cable & Connectors:	3.8 kg - 4.1 kg
Mounting	
	Wall mount
Height:	422 mm
Width:	205 mm
Diameter:	124 mm
Protection	
	IP44
Operating Temp	-25C -+ 40C
Options	MID Meter
Accessories	
GLK1 T23A 230V	EV Cable Type 2 32A / 230V



Dimensions



Type 1 (J1772) Fixed Connector
(max 230V / 32A / 7.4 kW)



EU standard Type 2 (IEC 62196) Socket Outlet
OR Fixed Connector (max 400V / 63A / 43kW)

